


SHK[®]

PPR Pipes & Fittings

MANUFACTURERS OF PPR-C PIPES AND FITTING

Future of HVAC Applications

From Conventional Metal Pipes To **SHK[®] Aqua - PPR-C Pipes**

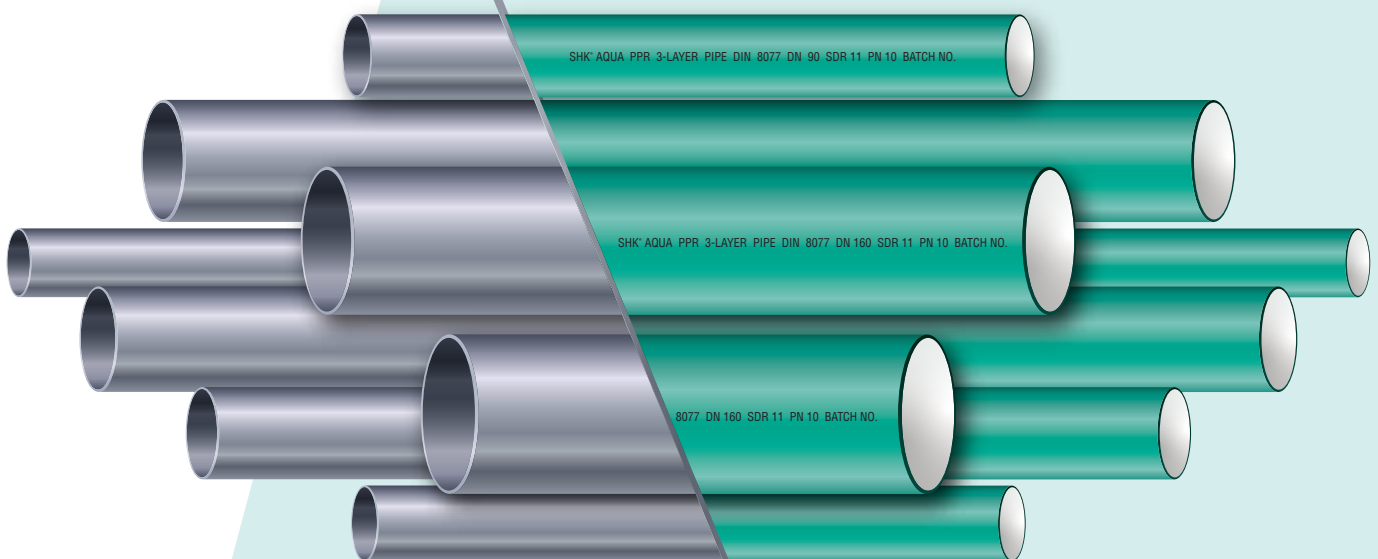

SIZES: 20 MM TO 400 MM (OD)
PRESSURE RATINGS: PN10, PN16 & PN20






FEATURES OF PPR-C PIPES AND FITTINGS

- Wide Operating Temperature range: (-8) to 95 Degree Celsius
- Lighter in weight
- Longer Service Life
- No Leakage Chances
- Clean Water/ Liquid Food Supply (CFTRI Approved)
- Very low Thermal Conductivity (0.23 W/mK)
- No Electrical Conductivity
- Anti-Corrosive
- UV Stabilized Outermost Layer
- Negligible Heat Loss

Applications of PPRC Pipes

- Hot/Cold Water Supply
- Chemical Plants
- Cooling Towers
- Chillers/Radiant Heating and Cooling/Data Center Cooling/AHU's/Condensor
- Pharmaceutical Industries
- Effluent/ Water Treatment Plants
- RO Drinking Water Plant
- Solar Water Heater
- Hotels, Hospitals & Commercial Malls
- Compressed Air Supply
- Vacuum Air/Nitrogen Air Supply

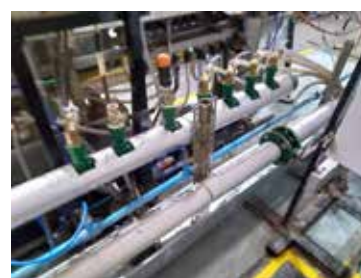

COMPARISON OF PPR-C PIPES WITH METAL PIPES (SPECIFIC TO HVAC APPLICATION)

Sr. No.	SPECIFICATION	COMPARISION	
		MS Pipes	PPR Pipes
1	Service Life	3 - 5 Years	50 Years
2	Food Grade	Poor due to corrosion issues	Hygienic, CFTRI approved - can supply clean wataaer and liquid food
3	Leakage	High chances	Negligible chance due to Scket Fusion based welding
4	Heat Loss	High	Negligible
5	Thermal Conductivity	Very High (45 W/mK)	Low (0.23 W/mK)
6	Maintenance Cost	High after 3-4 years	Negligible upto 10 years
7	Corrosion Ressistance	Nil	Excellent
8	Friction	Very High	Negligible due to smooth layer
9	Weight	Very heavy	Very light
10	Painting Cost	Additionally high for painting the pipes as per standards	None

Advantages of Using PPRC Pipes

over MS Pipes for HVAC (Chilling Plant/Cooling Tower) Application

- (i) Overall Project Cost gets economical by 15-20%
- (ii) Insulation Requirement In PPR: $\frac{1}{2}$ to $\frac{1}{3}$ rd of MS Pipes
- (ii) Transportation cost decreases by $\frac{1}{4}$ th of MS Pipes
- (iv) Material Handling becomes quite easy compared to MS Pipes
- (v) Negligible Pressure drop even after years of service and so desired flow rate can be obtained.

End Cap



Elbow 90 Degree



Socket



Tee



Flange Core/Stubend



Reducer



Reducer Tee



PPR-Flange



M T Socket



FT Union



Welding Process



Cutting

- Cut the pipe at right angle to its axis using burr-free cutter
- Ensure the pipe is free from burrs or cutting chips
- Clean the pipe & fitting perfectly before welding
- Mark welding depth at the end of pipe



Heating

- Mount the suitable Dies (Socket & Punch) on heating element of welding machine according to the diameter of pipe & fitting to be welded
- Connect the welding machine to 220 Volts A.C. power supply
- Select 260° C temperature on the welding machine hermostat
- After reaching required temperature, insert the pipe & fitting in the Dies (i.e. Socket & Punch respectively) by exerting light pressure
- Heat both pipe & fitting as per the size and time given in the following table



Welding

- After heating, quickly insert pipe into the fitting by exerting light pressure
- Any misalignment should be corrected immediately after insertion to avoid any stress in the weld. This type of connection ensures perfect sealing even under the hard working conditions.



Note :

1. Avoid air draughts during welding to avoid stress in the welds.
2. During site welding, keep the welding set at a right angle to the pipe and fitting in order to avoid partial welding.

About Company

SHK Polymers Industries, an ISO-9001-2015 certified company, as one of the leading thermo processing and manufacturing company, established in the year of 2013. Our SHK brand Polyolefin Pipe product range includes complete range of Polypropylene Random Copolymer (PPR-C) Triple Layer Pipes & Fittings for Hot & Cold water connection of Domestic, PPR Thermal Composite Pipes & Fittings for Industrial Application and PPR Composite Pneumatic Pipes & Fittings for Compressure Air Line Industries. Our products are manufactured of the best quality of raw material procured from the most reliable sources available in the world.

SHK[®] Thermo

SHK[®] Aqua

SHK[®] Pneumato


SHK[®]
HDPE Pipes & Fittings

PPR-C Pipes in size : 20 mm to 400 mm

PPR-C Fittings in size : 20 mm to 200 mm (Socket fusion) &
200 mm to 400 mm (Butt welded)

HDPE Pipes in size : 20 mm to 450 mm

Our Network

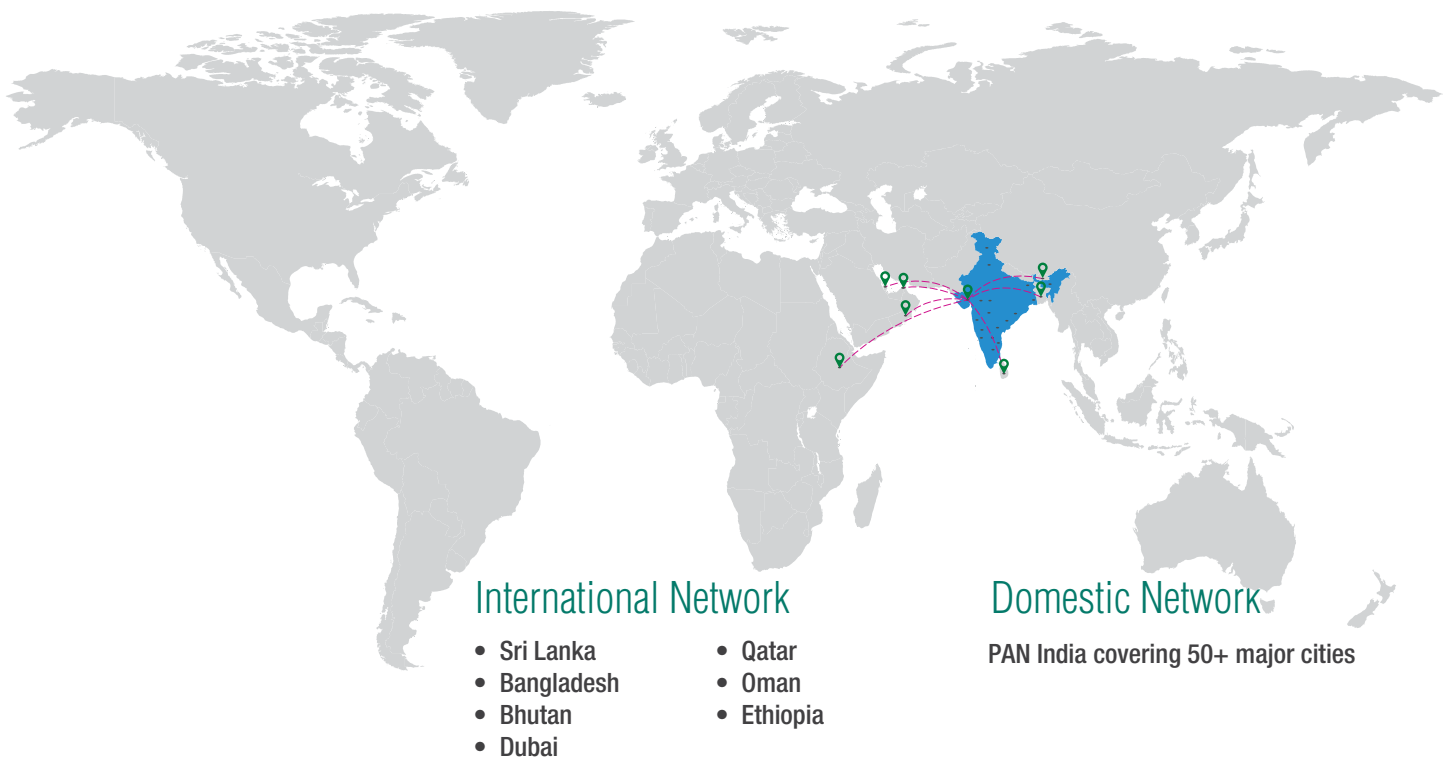

SHK POLYMERS INDUSTRIES

Reg. Office

“Harikrishna House”, Plot No: 139/1,
Phase-I, Opp. Patel Alloy Steel Ltd.,
GIDC, Vatva, Ahmedabad - 382445,
Gujarat, INDIA.

☎ +91 97243 23586

☎ +91 - 79 - 2583 1110-41-42, 2583 5359,

☎ +91 - 79 - 2589 2630

✉ info@shreeharikrishna.net

🌐 www.shreeharikrishna.net

